

May 16, 2001

ALGER-LITE II
Trim-Kit Recessed Mounting Instructions
Sheetrock ceiling

***** **WARNING** *****

DO NOT lift Alger-Lite II with the lite bar . You will ruin the motor !!

1. Refer to positioning diagram. NOTE: the centerline between the two bulbs is 7 ¼ inches from the RIGHT edge of the Alger-Lite cabinet. Determine where the Alger-Lite should be positioned using a plumb bob.
2. See standard installation instructions for wiring requirements.
3. Rough in ceiling joists for the Trim Kit. Rough in size: 16 ½ inches wide X 12 ½ inches.
4. If there is plenty of open space above the ceiling joists, it is best to secure the trim kit to the rough opening with the four screws/nails first and then slip the Alger-Lite up through the opening and set it back down onto the trim kit frame. If space above the ceiling is limited, it will be necessary to hold the Alger-Lite up while fastening the trim kit frame and then lower the Alger-Lite down onto the frame.




ALGER EQUIPMENT CO., INC.

320 Flightline
Lago Vista, TX 78645

TOLL FREE: 800-320-1043

Phone: 512-267-0383

FAX: 512-267-0452

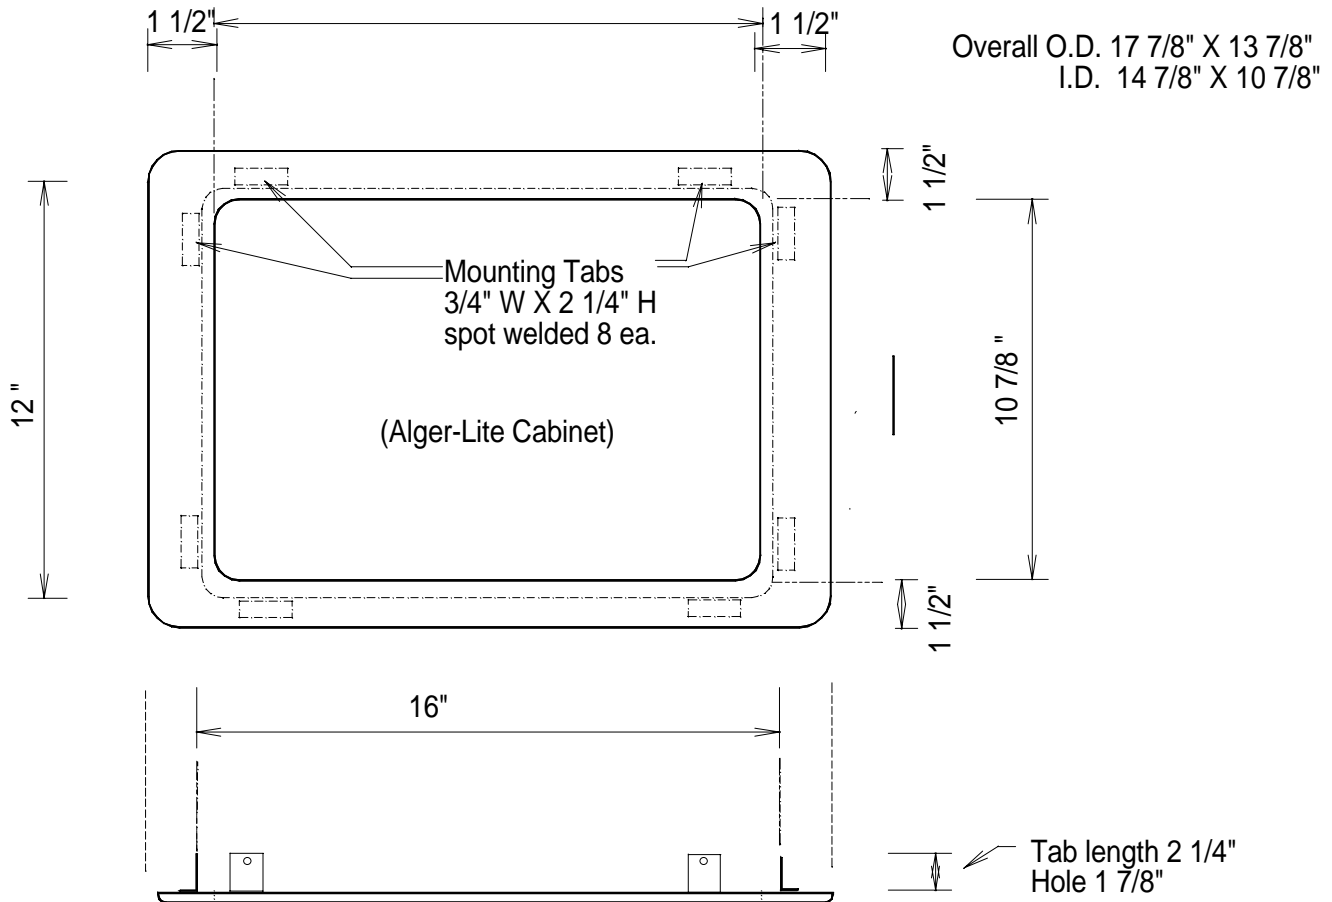

Alger-Lite Trim Kit for drywall applications

Alger Equipment Co., Inc. Ph# 512-267-0383
320 Flightline
Lago Vista, TX 78645